

SUPERNOVA™ STAR

SUPERNOVA™ STAR 240 - SUPERNOVA™ STAR XGA250



Highest Quality

State-of-the-art plasma screens and superior audio and video coding technology

Enriches Collaboration

Integrated, multi-standard MCU connects up to 7 sites with Continuous Presence feature

Sleek Design

Advanced design graces any executive conference room

OVERVIEW

Combining elegance with compact efficiency, Supernova™ Star XGA 240 and XGA250 each integrate a complete videoconferencing system in a professional, sleek rollabout. The two large plasma screens enable every visual angle to be covered in conference rooms of all dimensions. The integrated Multipoint Conferencing Unit (MCU) connects up to 7 sites in mixed mode (ISDN and IP), with convenient dial-out and dial-in (Meet Me) configuration. Continuous Presence feature enables participants at all sites to view one another simultaneously.

SIMULTANEOUS DUAL-STREAM VIDEO

Convenient XGA input and output ports provide one-step PC plug-in or LAN connection for simultaneous dual-stream video and live PC presentations with enhanced images.

MULTIPLE NETWORK CONNECTIVITY

Supports 768 kbps over ISDN BRI and 2 Mbps over IP, as well as connections up to 2 Mbps over ISDN PRI and IP, or over leased lines (X.21, V.35, RS449, G.703).

MULTILINGUAL INTERFACE

Provides multilingual, on-screen graphic user interface. Users can select from English, Italian, French, Spanish, German, Portuguese, Norwegian, Swedish and Chinese.

EASY TO MANEUVER

Two 40" or 50" high quality plasma monitors are integrated on a single rollabout stand for convenient maneuverability.

FEATURES AT A GLANCE

- 2 40" or 50" high quality plasma screens on a single rollabout stand
- Simultaneous dual-stream video
- Integrated MCU with Meet Me configuration
- Embedded PowerPoint™ presentations
- Patented Voice Tracking camera
- 360° digital microphone pod
- Full-duplex echo cancellation
- Remote diagnostics and web management
- Contextual help





TECHNICAL SPECIFICATIONS

SUPPORTED STANDARDS

- ITU-T H.320 ISDN, leased networks
- ITU-T H.323 IP networks
- Video H.261, H.263++ (I,J,T,F)
- Audio G.711, G.722, G.728, G.723.1
- Data T.120
- MCU compatibility H.243

TRANSMISSION

- Bit rate 56÷768 kbps over ISDN 6BRI
56÷2 Mbps over ISDN PRI*
64÷2 Mbps over IP
56÷2 Mbps over V.35 / leased lines

- * in North America ISDN PRI/T1 at 1544 kbps (ANSI T1 recommendations)
- Simultaneous video motion coding and PC presentations from the XGA input


VIDEO

- Frame rate 15 frame per second @ 56-168 kbps
30 frame per second @ 168 kbps-2 Mbps
- Video resolution 4CIF 704x576 pixels
FCIF 352x288 pixels
QCIF 176x144 pixels
4CIF 704x576 pixels for still images (H.261 Annex D)
Up to 1024x768 over XGA in H.263
- Camera remote control H.281 (H.320)
H.282/H.283 (H.323)

AUDIO

- | Audio | Band | Bit rate |
|---------|---------------|--------------|
| G.711 | 300 ÷ 3400 Hz | 56 kbps |
| G.722 | 50 ÷ 7000 Hz | 48/56 kbps |
| G.723.1 | 300 ÷ 3400 Hz | 5.3/6.3 kbps |
| G.728 | 50 ÷ 3400 Hz | 16 kbps |

- Echo cancellation Full-duplex
- Echo Return Loss Enhancement (ERLE) 30 dB
- Automatic Gain Control (AGC) ±12 dB
- Automatic Noise Suppression
- Bi-amplified bass treble loudspeaker 2x40W RMS

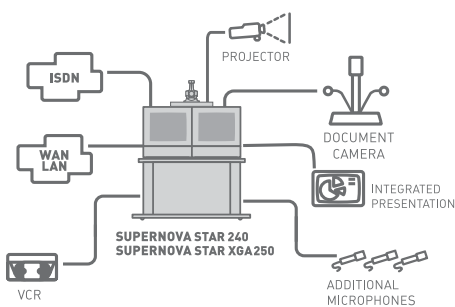

Aethra SpA
Telecommunications
via Matteo Ricci 10
60020 Ancona - Italy
Telephone +39.071.218981
Fax +39.071.887077
Video 1 +39.071.2189160
Video 2 +39.071.2189701
Email: info.aethra@aethra.com
www.aethra.com

AUDIO TRACKING

- Tracking Enhanced Voice Tracking
- Coverage max. 7 m, recommended 4 m
- Location ± 60° horizontal, ± 25° vertical

DIGITAL MICROPHONE POD

- Coverage 360°
- Response 50÷7000 Hz
- Microphones 3
- Mute button
- Up to 2 pods in a daisy-chain configuration

CAMERA

- Resolution 752x582 pixels
- Preset 2 presets
- H. angle of view 6,6 to 65 Degrees
- Zoom 40x (10x optical + 4x digital)

MONITOR

- Dual monitor
- Picture diagonal 40 inch Supernova Star 240
- Picture diagonal 50 inch Supernova Star XGA250
- PIP function

NETWORK INTERFACES

- ISDN 6 BRI ISDN with integrated channel aggregator 6 RJ-45
1 E1/T1 PRI with integrated channel aggregator 1 RJ-45
- Ethernet 2-Port 10/100BASE-T full-duplex with integrated switch Ethernet 2 RJ-45
- Leased networks X.21/V.35/RS366/RS449/RS530 44pin Hi/Den
G.703 1 RJ-45

AUDIO/VIDEO INTERFACES

- Video input Main camera S-video (Mini-DIN)
3x Aux Composite (BNC)
3x Doc.Cam. S-video (Mini-DIN)
XGA In DB15 Hi/Den
- Video output Monitor 1 Composite (BNC)
S-video (Mini-DIN)
Monitor 2 Composite (BNC)
S-video (Mini-DIN)
VCR Composite (BNC)
S-video (Mini-DIN)
XGA Out DB15 Hi/Den
- Audio input Connection Level Connector
2x Pod Mic. 360° Mic. RJ-11 6/6
3x Aux.mic. Mic. XLR
3x Audio In Line RCA
- Audio output 4x Audio Out Line RCA

Aethra, Inc.
701 Brickell Avenue
Suite 1390
Miami, FL 33131 USA
Telephone +1.305.375.0010
Toll Free (US only) 1.888.4.AETHRA
Fax +1.305.375.0655
Video +1.305.577.3524
Email: info.na@aethra.com

AUXILIARY INTERFACES

- Voice Tracking DB9
- Data RS232 DB9
- Diagnostics RS232 DB9
- VISCA RS232 Mini-DIN 8-pin
- PC CARD
- Supports Canon or Sony aux PTZ cameras
1 PCMCIA, type III

USER INTERFACE

- Multilingual on-screen graphic user interface
- User selectable languages: Italian, English, French, Spanish, German, Portuguese, Norwegian, Swedish, Chinese
- Infrared remote control for full function control
- Contextual Help
- Diagnostics and management functions
- Call progress monitoring
- Supports AMX™ or Crestron™ touch panels

MULTIPOINT FUNCTION

- Integrated MCU H.320 and H.323 mixed mode
7 participants @256kbps
5 participants @384kbps
4 participants @512kbps
3 participants @768kbps
- Compatible with analog and mobile networks
- Video coding H.261, H.263++
- Audio coding G.711, G.722, G.728
- Chair control H.243
- Dial-In/Dial-Out capabilities
- Continuous Presence

WEB MANAGEMENT

All the configuration, call, diagnostics and management functions are accessible using the following web browsers: Microsoft® Internet Explorer™, Netscape Navigator™

REMOTE DIAGNOSTICS AND MANAGEMENT

	Local	Web Browser	SNMP
Self test	Yes	Yes	Yes
Diagnostics	Yes	Yes	Yes
Configuration	Yes	Yes	Yes
Call	Yes	Yes	
Error tracking	Yes	Yes	Yes

INTEGRATED PRESENTATION

- Supported applications Microsoft® PowerPoint®
- Multimedia support T.120

POWER SUPPLY

- 110-120 Vac 60 Hz 8 A Max
- 220-240 Vac 50 Hz 4 A Max

DIMENSIONS

- SUPERNOVA STAR 240
Width 216 cm (85")
Height 191 cm (75")
Depth 74 cm (29")
- SUPERNOVA STAR XGA250
Width 245 cm (96")
Height 191 cm (75")
Depth 74 cm (29")